

PERFREZ® PXC (CZ75CK50) Product Data Sheet

Semiconductor applications



Our range of PERFREZ® high performance materials for semiconductor processes meets the most challenging and demanding applications for aggressive chemicals, gas and high temperatures. These materials offer excellent chemical and thermal resistance, thermal stability and high purity under these extreme process conditions.


We provide our customers with the highest quality products and technical support on seal design, material recommendation, installation techniques and test analysis, specifically for the semiconductor market.

CZ75CK50 FFKM is specially developed for semiconductor equipment wet manufacturing processes. PXC also offers excellent resistance to a wide variety of chemistries including acids/bases.

Basic Polymer: Perfluoroelastomer
Hardness: 75 +/- 5 Shore A
Temperature range: -10°C to +260°C
Colour: Black


Key features

- **Broad chemical resistance**
- **Excellent physical properties**
- **Exceptional heat resistance**
- **High temperature capability**



Products

- **High performance o-rings**
- **Special mouldings**
- **Rubber to metal moulding**

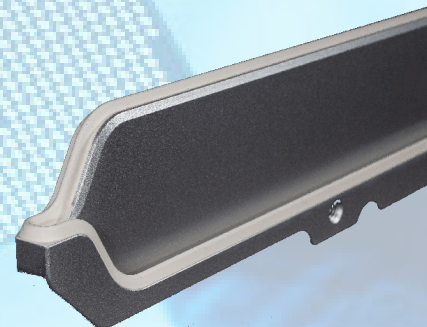

Property	Results
Hardness (Shore A)	75 (+/-5)
Elongation at break, %	193
Tensile Strength, psi (MPa)	2428 (16.74)
Modulus @ 100%, psi (MPa)	653 (4.50)
Specific Gravity	2.02
Min. Operating Temperature, °C (°F)	-10 (14)
Max. Operating Temperature, °C (°F)	260 (500)

Applications

- **Door and Lid Seals**
- **Valve Seals**
- **KF-Fitting Seals**
- **Container Seals**
- **Drain Seals**

These results represent typical material properties and are not to be used for specification purposes. They are achieved under laboratory conditions and do not necessarily correspond to results measured on finished goods. It does not absolve the customer of the responsibility to make tests for their intended process or purpose. Ceetak Ltd makes no warranties and assumes no liability in connection with any use of this information.

